

DuraPass
Side hinged Personnel Door

Garage™
DOOR SYSTEMS

Side Hinged Personnel Doors



Innovation
award winner!

Patented
Design!
Patent No.
GB2530590

Great to come home to!

ERA





A design for you...

Brilliant!

The DuraPass door is a brilliant solution for access to your garage, outhouse or anywhere that needs a good looking, high performance entry door.

Clever design keeps the face of DuraPass doors free from rivets and welds, eliminating corrosion stain from fixings. Just one of the features that makes DuraPass a true innovation! See pages 6 and 7 for more features.



Terms and conditions apply to the warranty on DuraPass doors, please ask for full details.



Flush in White



Linear medium in Rosewood

Colours

Choose a finish from our Standard colour palette or any RAL or BS colour.



If you don't see the colour you want in our Standard range, DuraPass doors are also available in any RAL or BS colour

Colour



Linear large in White



Vertical Board in Golden Oak

DuraPass

Side hinged Personnel Door



5

YEAR WARRANTY
RESIDENTIAL USE

2

YEAR WARRANTY
NON-RESIDENTIAL USE

Terms and conditions apply to the warranty on DuraPass doors, please ask for full details.



Door Handles & Hinges
Black handle and stainless steel hinges supplied as standard.

The Door Panel

Doors are available in single skin steel or insulated versions. The insulated door (pictured near right) has a sandwich construction of twin corrosion protected steel skins filled with an insulating core. The rear of the door panel is finished in an off-white light reflecting finish. On insulated Golden Oak and Rosewood doors the inside foil finish will match the exterior.

The single skin door (pictured far right) is constructed from corrosion protected steel. The frame and door stiffening sections match the front face of the door, whilst the rear of the door panel is finished in an off-white light reflecting finish.



DuraPass insulated door - inside view



DuraPass single skin door - inside view


Each door looks great on its own but is also designed to complement with many popular garage door designs. Creating matching styling for your home has never been easier!

Let the light in!

Add a touch of individual style & elegance with our glazing options. Assembled with Toughened Safety Glass (Glass ABS 6206: 1981), our opaque windows allow light to enter your garage without compromising security. Clear versions are also available.

Windows are positioned centrally in the upper third of the door panel. Windows are only available for DuraPass Insulated doors.

Insulated Door Panel

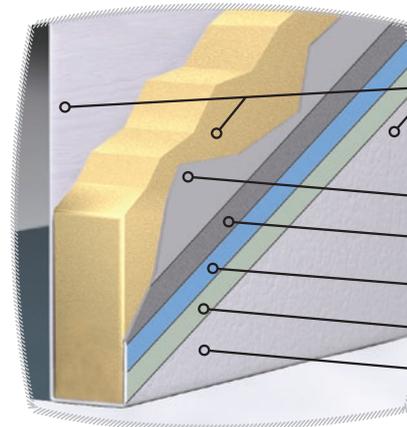

- Sandwich Construction with 35mm Polyurethane Insulation
- Cold Rolled Steel Core
- Hot Dip Galvanisation
- Chemical Treatment
- Primer Coat
- Finishing Top Coat

Stainless Steel
Clear or opaque options



Round



Square



Designer Style



Designer Style

Factory finished solid colours and wood effect finishes create a classic design statement on any home. See previous pages for the full range.



Attention to detail

Clever design - no rivets or welds to the front face of the door. Matching design - door and frame match perfectly, nice handle too!

DuraPass

Side hinged Personnel Door

Award winning innovation!

DuraPass has an award for innovation and it's easy to see why! Clever design and smart features bring great benefits to every-day use and offer excellent durability and life-span. DuraPass is available in inward or outward opening versions.

Feature File




Security Guard



Dual latch **ERA** centre locks complete the standard four-point locking on every door.



Fitted with corrosion resistant stainless steel security plate for extra security.

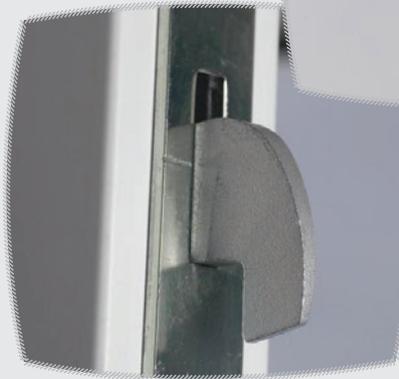

Hardened, galvanized twin hook latches make up the multipoint locking system.

Extra Easy



Supplied with 3 keys as standard. Replacement keys can be duplicated from a standard blank at any locksmith.



A Kite-Marked **ERA** anti-bump cylinder is available as an option.



Standard low-profile threshold makes it easy to move any wheeled item in or out.

Quality in every detail!




CE marked for safety and tested to the latest European safety legislation.



Weather Shield



Neoprene seal runs around the inside of the door frame and also helps to prevent water ingress around the door.



Insulated panel versions provide enhanced weather-beating performance.



Inward opening doors include a threshold and seal strip onto which the door leaf closes. This helps to reduce water ingress under the door.



Built to Last



Robust, alloy door lock handles provide extra security.



Doors are pre-framed with three stainless steel hinges and spot riveted for extra strength.



Sizes & Technical Specifications

Doors are available in standard and custom sizes

Standard Overall Frame Widths

885mm
985mm
1140mm

Standard Overall Frame Heights

1865mm
2090mm
2190mm
2490mm

Any custom width from
790mm - 1140mm

Any custom height from
1850mm - 2490mm




Terms and conditions apply to the warranty on DuraPass doors, please ask for full details.


Standard Colours in PVC Foil: Black, Anthracite Grey, Goosewing Grey, Juniper Green, Golden Oak and Rosewood. White doors are a polyester painted finish.

Optional Custom Colours: Any RAL or BS colour is available as a custom painted finish.


Thresholds

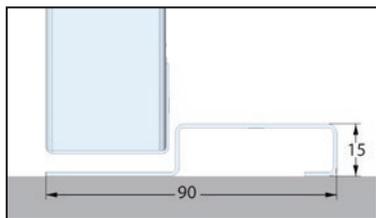

Standard open out 15mm low profile threshold

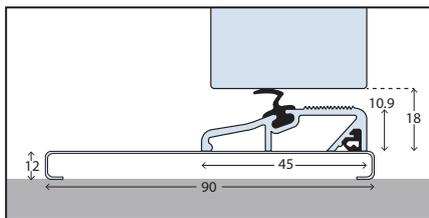


Standard inward opening threshold

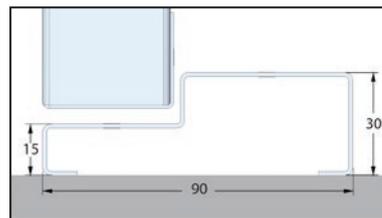

Optional 30mm open out threshold (must be specified if required)

Overall Frame Dimensions

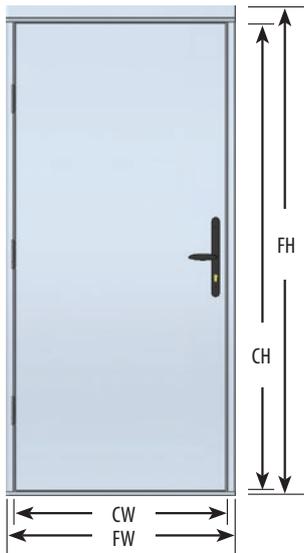

FW Frame width

CW Clear passage width = FW - 127mm

FH Frame height

CH Clear passage height = FH - 80mm For standard 15mm low profile threshold

CH Clear passage height = FH - 90mm For optional 30mm ramped threshold

To order specify:

Ordering size: No fitting clearance allowed. Garage Door Systems recommends allowing 15mm in width and 10mm in height when fitting between brickwork.

Handing: Hinged on the left or right as viewed from the outside.

Opening: Outward or inward as viewed from the outside.

Threshold: Standard 15mm low-profile threshold.

Standard white and foil doors are supplied with a protective film that must be removed within thirty days.

Example:

For a 1000mm x 2100mm structural opening, order your door as 985mm x 2090mm.

Please see Garage Door Systems Survey/Order form for full details, diagrams and additional fitting options.

Fitting note: To minimise the ingress of rain run-off between the foot of the door leaf and the door threshold, consideration must be given the floor surface to which the door is fitted, ensuring that water is able to drain freely away. This particularly important on inward opening doors.



Garage Door Systems Limited, Wakehurst Ind. Est., Ballymena, BT42 3AZ

NI: Tel: 028 2565 5555

Fax: 028 2564 4030

RoI: Tel: 1850 510 510

Fax: 028 2564 4030

UK: Tel: 0870 242 3 242

Fax: 0800 085 2741

Email: info@gdsdoors.eu

Web: www.gdsdoors.eu

Authorised Specialist